

Small Diameter Cut-Off Wheels



Small Diameter Cut-Off Wheels

Small Diameter Cut-off Wheels

Small Diameter Cut-off Wheels are reinforced with multiple layers of fiberglass. They are able to withstand severe peripheral, side, and wedge

stresses. This assures maximum safety even where joining, slotting, notching, or cutoff work would normally create a hazard.

Available for: Ferrous and Non-Ferrous Metals, Masonry, and Special Applications.

WARNING




- Wear approved eye protection & respirator!
- Do not use without all guards in place!
- Speed not to exceed marked RPM!
- Read Safety Pamphlet in box!

Gulf States manufactures specialty sizes and specifications to meet your needs.

Diameter	Thickness	Arbor Size	Std. Rec. RPM
1"	.035, 1/16, 1/8	1/16, 1/4	60,000 *
2"	.035, 1/16, 1/8	1/16, 1/4, 3/8	30,600 *
2-1/2"	.035, 1/16, 1/8	1/4, 3/8	24,500 *
3"	.035, 1/16, 1/8	1/4, 3/8	18,000 *
4"	.035, 1/16, 1/8	3/8, 5/8, 7/8	15,300 *
6"	.035, .040, .045 1/16, 1/8	5/8, 7/8	10,200 *
7"	1/16, 3/32, 1/8	5/8, 7/8, DA	8,740 *
8"	1/16, 3/32, 1/8	5/8, 7/8, DA	7,640 *

***NOTE:** RPMs may vary on diameter, thickness, reinforcement, and specifications of Small Cut Off Wheel.

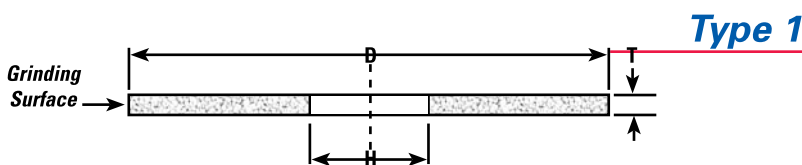

Type 1 Straight Wheel
Peripheral Grinding Wheel having a diameter, thickness and hole.

SAFETY FIRST

Don't force a wheel onto the machine or alter the size of the arbor hole. Don't use a wheel that fits the arbor too loosely. If the wheel doesn't fit the machine, get one that does.

