

Snagging Wheels



Snagging Wheels

Snagging Wheels

Resin reinforced snagging wheels are thoroughly proven and acceptable for reasons of favorable job performance and safety. Ideal for weld preparation and grinding or for cleaning of castings, as well as many other rough applications.

SAFETY FIRST

Always ensure work rest is properly adjusted; center of wheel or above, no more than 1/8" away from wheel.

Available for: Ferrous and Non-Ferrous Metals, Masonry, and Special Applications.

WARNING




- Wear approved eye protection & respirator!
- Do not use without all guards in place!
- Speed not to exceed marked RPM!
- Read Safety Pamphlet in box!

Gulf States manufactures specialty sizes and specifications to meet your needs.

Diameter	Thickness	Arbor Size	Std Rec. RPM
2 1/2"	1/4, 3/8, 1/2	1/4, 3/8	21,000 *
3"	1/4, 3/8, 1/2	1/4, 3/8	18,000 *
4"	1/4, 3/8, 1/2	1/4, 3/8	15,300 *
6"	1/2, 3/4, 1	5/8	8,000 *
8"	1/2, 3/4, 1	5/8	6,000 *
10"	1/2, 3/4, 1, 1 1/4, 2	7/8, 1, 1 1/4, 2	4,600 *
12"	1/2, 3/4, 1, 1 1/4, 2	1, 1 1/4, 2, 3 1/2	3,980 *
14"	1/2, 3/4, 1, 1 1/2, 2, 2 1/2	1, 1 1/4, 1 1/2, 2, 3 1/4, 5	3,400 *
16"	1 1/2, 2, 2 1/2, 3	1 1/4, 2, 6	2,950 *
18"	1 1/2, 2, 2 1/2, 3	3 1/2, 6	2,710 *

***NOTE:** RPMs may vary on diameter, thickness, reinforcement, and specifications of Snagging Wheel.

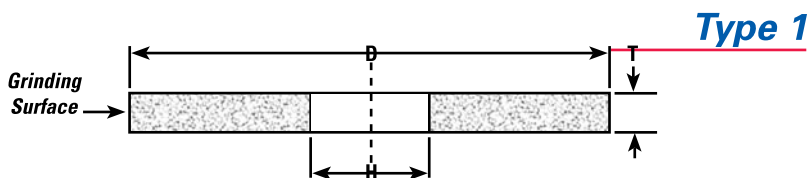

Type 1 Straight Wheel
Peripheral Grinding Wheel having a diameter, thickness and hole.

